


CG33C HEAVY DUTY SERIES


FULL SURFACE SWING CLEAR 1/32" INSET



Closed Position

90° Open Position

180° Open Position

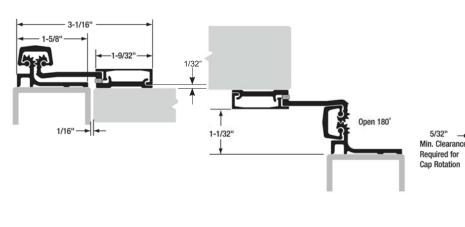



- For permanent replacement of existing frame and new doors
- No mortising of doors or frames required
- Will cover butt hinge cut-outs in old frames
- Swing door completely out of door opening
- For use on flush aluminum, glass rail, hollow metal or wood doors
- Full Surface
- ♦ 1/32" inset
- Material Extruded 6063-T6 Aluminum Alloy w / Polyester thrust bearings
- Can manufacturer hole sizes & locations per customers specs
- No door reinforcement required
- Over 200 lbs reinforce frame with 16 Ga. channel
- ♦ For doors up to 450 lbs
- ♦ Template and hole pattern is same from hinge to hinge
- 83" can be field cut to 79" without cutting thru a bearing or mounting
- ♦ Hinge is non-handed unless cut in the field
- UL listed for up to 3 hours

PBB Model Number	Length		Screw Count	
	Inches	Centimeters	Door	Jamb
CG33C83	83"	210.8	10	14
CG33C85	85"	215.9	10	14
CG33C95	95"	241.3	11	15
CG33C120	120"	304.8	14	18

628 - CLEAR ANODIZED - US28

710 - DARK ANODIZED - US10B

