




CH51L SS PIN & BARREL SERIES

FULL MORTISE WITH HALF GUARD








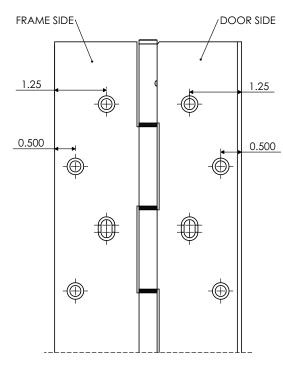


013

Closed Position



90° Open Position



- For square edged doors
- ◆ For 1 ¾" doors
- Supports door weights up to 600 lbs.
- ◆ 4'0" Maximum door width
- For high traffic, high abuse doors
- No exposed fasteners when door is closed
- ◆ Door edge lip on stop side only
- Material –Heavy-duty 13 gauge 304 Stainless Steel
- Self drilling screws
- ◆ 1/4" diameter stainless steel pin
- ◆ Concealed flush mount
- ◆ Conforms to ANSI/BHMA 156.26, Grade 1
- ◆ UL/ULC fire listed on wood doors for up to 20 minutes
- UL/ULC fire listed on hollow metal & composite wood fire doors for 90 minutes
- UL/ULC fire listed on hollow metal doors for up to 3 hours
- Meets UL10B, UL10C, UBC 7-2.

630 - Satin Stainless Steel - US32D

PBB Model	Length		Screw Count	
Number	Inches	Centimeters	Door	Jamb
CH51L79	79-1/8"	201.0	20	20
CH51L83	83-1/8"	211.1	21	21
CH51L85	85"	215.9	21	21
CH51L95	95"	241.3	23	23
CH51L119	119"	302.26	27	27

Screw Pack#	Standard Full Mortise Fasteners	
1	10 x 3/4" P.F.H. undercut self drilling tek screws	
2	10 x 1/4" P.F.H. undercut sheet metal screws	

PLEASE SPECIFY SCREW REQUIREMENTS IF DIFFERENT Refer to page 53 for screw information.