




HALF SURFACE TEMPLATE CONCEALED BEARING

HEAVY WEIGHT
5"

G3

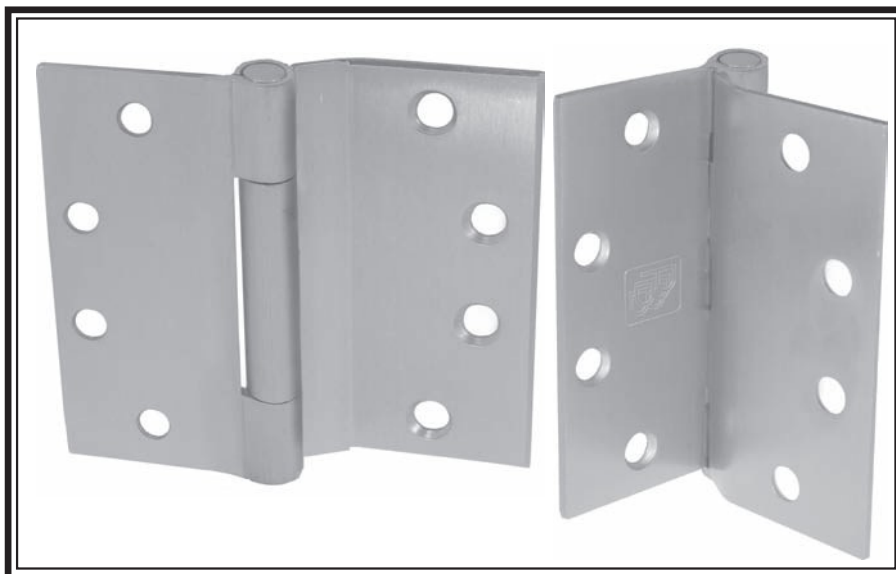

GENERAL PRODUCT INFORMATION: PBB, Inc. template hinges are manufactured to close tolerances and meet all specifications and requirements set by the American National Standards Institute (ANSI).

ALL HALF SURFACE HINGES ARE MADE FOR
REVERSIBLE APPLICATIONS

MATERIAL GAUGE: .
.190 ± .005 for 5"

4C84 (ANSI A8411)

Steel-Polished and Plated or Bonderized and Prime Coated for Painting.


4C24 (ANSI A2411)

Brass-Polished and Plated

4C54 (ANSI A5411)

Stainless Steel-Polished and Satin Finish

- For heavy weight mineral core doors or hollow metal doors with channel iron frames receiving high frequency service.
- For hospital type, add HT to suffix of part number.
- Concealed bearing for trouble free long life application
- Attractive slim barrel with flush pins and plugs
- All hinges are ANSI template.



Measurements below

OTHER SPECIFICATIONS:

Height of hinge:
5.00 + .000
- .015 for 5"

Width:
Jamb Leaf: (A) 2-1/8"
(inches)
Door Leaf: (B) 2-7/8"
(inches)
Offset: (C) 5/8"
(inches)

5" STANDARD SCREW SIZE

FHMS - 12-24 x 1/2"
OHMS - 2" x 1/4-20

PACKAGING INFORMATION:

One hinge per plastic bag, 3 hinges and 1 screw pack per unit carton.
12 unit carton or 36 hinges per master shipping carton.
1 screw pack includes all machine screws (8) and grommet nuts for 1-3/4" door.