




**3-KNUCKLE FULL MORTISE CONCEALED PLAIN BEARING  
STANDARD WEIGHT  
4 1/2" X 4" 4 1/2" X 4 1/2"**

**B14**

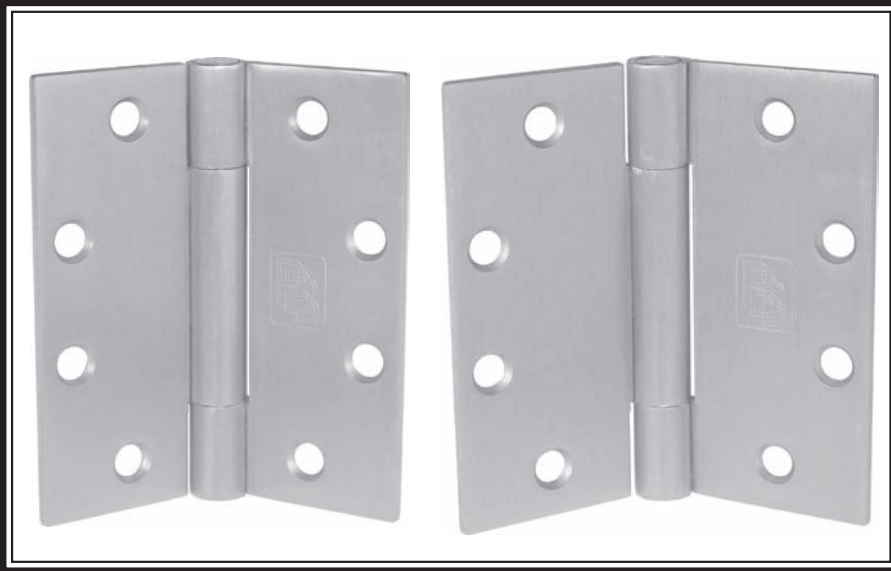

**CP81 (ANSI A8133)**  
**Steel**-Polished and Plated or Bonderized and Prime Coated for Painting.

**CP21 (ANSI A2133)**  
**Brass**-Polished and Plated

**CP51 (ANSI A5133)**  
**Stainless Steel**-Polished and Satin Finish

- For medium weight doors receiving low frequency service.
- Hole in bottom tip for easy pin removal.
- Attractive slim barrel with flush pins and plugs.
- Not for use with door closers.
- For hospital type, add HT to suffix of part number.
- All hinges are ANSI template.

**GENERAL PRODUCT INFORMATION:** PBB, Inc. template hinges are manufactured to close tolerances and meet all specifications and requirements set by the American National Standards Institute (ANSI).

**HINGE SWAGING:** A standard swaging of our standard weight full mortise hinge when closed to parallel position provides a 1/16" clearance between leaves.

**OTHER SPECIFICATIONS:**

Height of hinge:	4.50 + .000	for 4-1/2" x 4"
	- .015	
	4.50 + .000	for 4 1/2" x 4-1/2"
	- .015	
Width:	4.00 ± .015	for 4-1/2" x 4"
	4.50 ± .015	for 4-1/2" x 4-1/2"

**MATERIAL GAUGE:**

- .134 ± .005 for 4-1/2" x 4"
- .134 ± .005 for 4-1/2" x 4-1/2"

4-1/2" STANDARD SCREW SIZE
FHMS - 12-24 x 1/2"
FHWS - 12 x 1-1/4"

**PACKAGING INFORMATION:**

- One hinge per plastic bag, 3 hinges and 1 screw pack per unit carton.
- 16 unit carton or 48 hinges per master shipping carton.
- 1 screw pack includes all machine screws (24), and 1/2 wood screws (12). ATMS & AWS also available.